



Datacable – Patchcable

SPEEDLAN®

pre-assembled flexible Patchcable (shielded / unshielded)

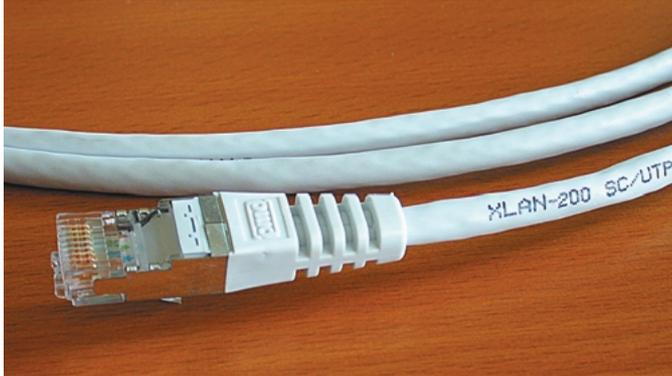

Type	VPE pcs.	Weight approx. /VPE
PATCHCORD RJ45-RJ45 SC/UTP 1,0	10	0,36
PATCHCORD RJ45-RJ45 SC/UTP 2,0	10	0,72
PATCHCORD RJ45-RJ45 SC/UTP 3,0	10	1,08
PATCHCORD RJ45-RJ45 U/UTP 1,0	10	0,25
PATCHCORD RJ45-RJ45 U/UTP 2,0	10	0,50
PATCHCORD RJ45-RJ45 U/UTP 3,0	10	0,75

Specification

Usable as patchcable in distribution cabinets and as connecting cord for PC's up to 100 MHz (Category 5)

Construction details

Modular-8 channel plug shielded resp. unshielded (product AMP) plug with extruded antikink sleeve (in slim construction) for optimal strain relief. Core wiring according to EIA/TIA-568 (type B).

Cable: XLAN-200 SC/UTP 26-4P resp. XLAN-200 U/UTP 26-4P

Note

Other lengths and halogenfree application on request.

Temperature range

during installation -5 up to +50 °C
for stationary conditions -30 up to +70 °C

