


ISDN

PremisNET®



6.0

ISDN Range

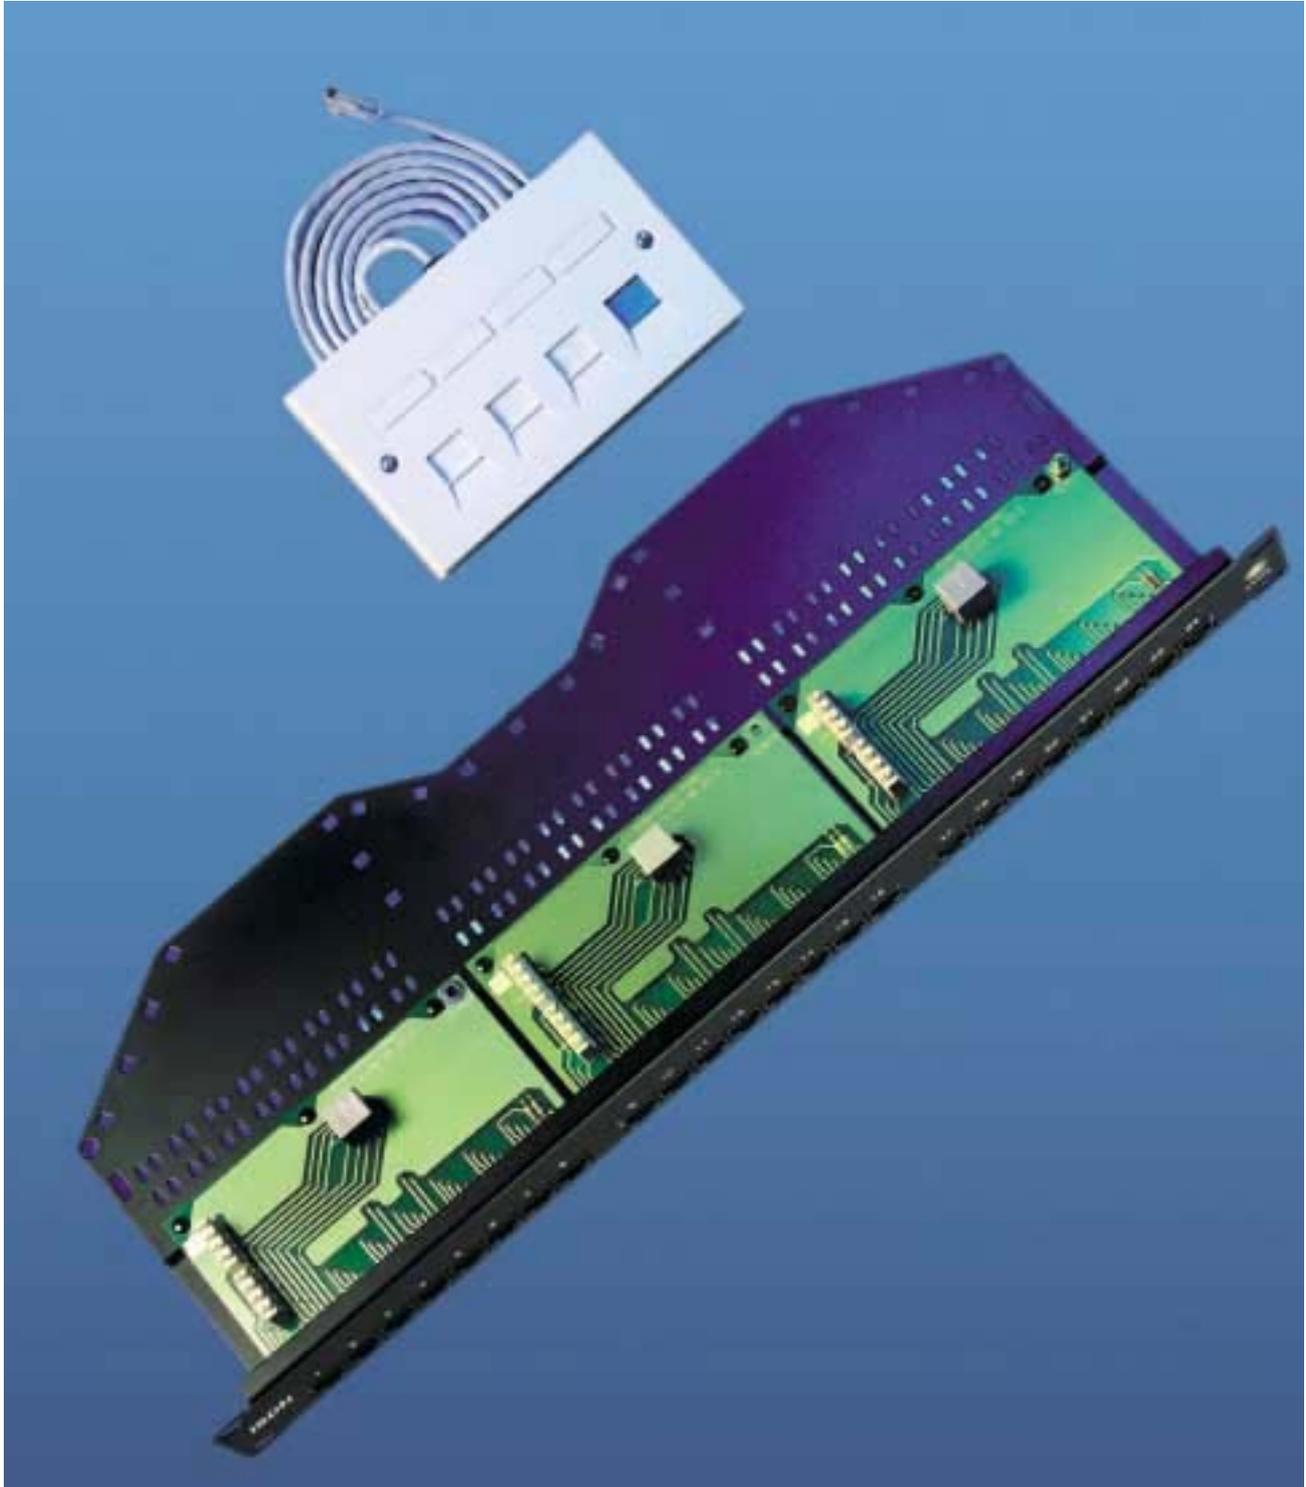

6.0 ISDN Range

ISDN Solutions

KRONE ISDN products

The KRONE ISDN product range enables ISDN services to be delivered to the desktop via traditional point to point wiring or structured cabling in a flexible, cost effective manner.


Very often companies set up a dedicated and fixed ISDN outlet which becomes a problem in today's business environment where more than one user needs access to the vast array of services that ISDN provides.

The new 19" ISDN Patch Panel 3/24 enables you to patch up to 3 Basic Rate ISDN services into your structured cabling system which will provide up to 24 users with ISDN services to their desk.



The 10" ISDN Patch Panel 1/8 for smaller structured cabling systems, installed in the MiniLAN, enables you to patch one basic Rate ISDN service to 8 users. For smaller solutions the 4 way ISDN Breakout Box is ideally suited for use in structured wiring systems and allows a single ISDN service to be distributed to up to 4 users.

Dimensions:

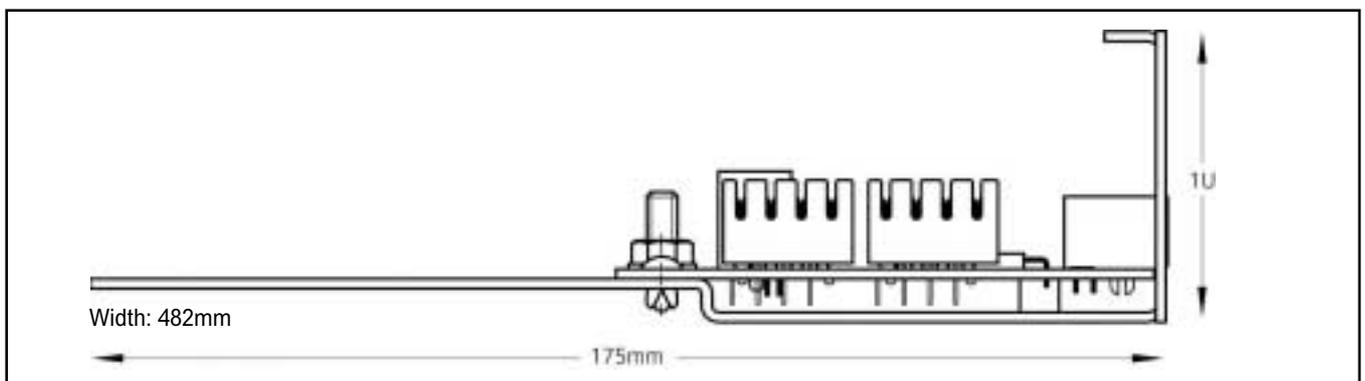

24 Port ISDN Patch Panel

The 24 port ISDN Patch panel allows the ISDN service to be distributed to several outlets by patching over a structured cabling system. It dispenses with the need for dedicated ISDN Outlets or ISDN Terminating Adapters as the ISDN Patch Panel itself has necessary S-BUS termination.



Features

- Utilizes your existing structured cabling system for ISDN as well as other services
- No need for dedicated ISDN cabling
- 1 ISDN line connects up to 8 ISDN users or devices
- Accomodates up to 3 ISDN inputs
- Provides portability for video conferencing facilities between offices
- RJ45-socket input or twisted pair

Wiring Details

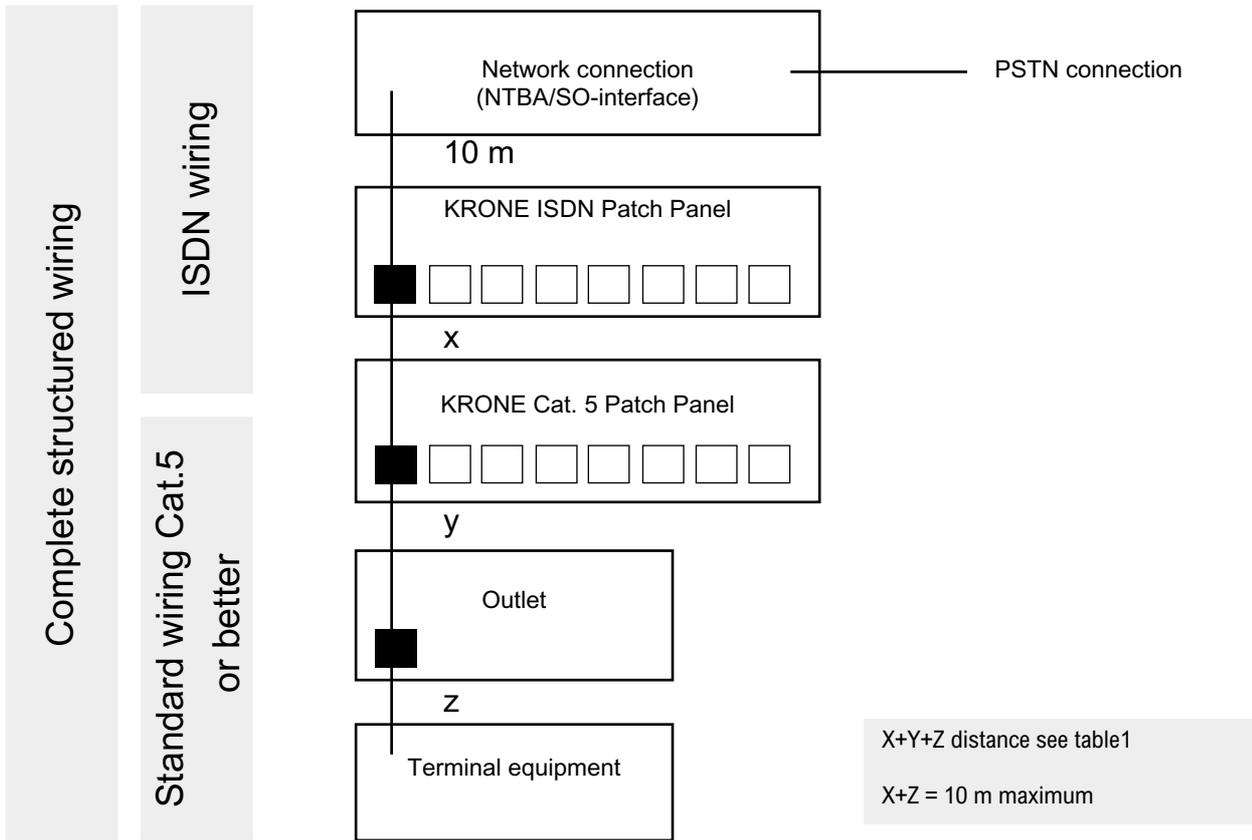


Table 1

The sum of the cable length per S_0 -Bus max. 420 m. The maximum cable-length per port on the ISDN-Patch Panel depends on the connected ports:

Used Ports	Max. length per port
1-4	100m
5	80m
6	70m
7	60m
8	50m


Notice:

The above-mentioned lengths include a maximum length of 10 m for the patch cord between ISDN Patch Panel und the Network connection with Cat. 5 cables or better. The mentioned length may deviate depending on the installed active ISDN components.

4 Way ISDN Breakout Box

The 4 Way ISDN Breakout Box is ideally suited for use in structured wiring systems and allows a single ISDN service to be distributed to up to 4 users

- Expands single point to point ISDN services to 4 access points
- Portable - allows installation to be moved around
- Provides multiple access in fixed wiring installation
- A cost effective way of increasing access

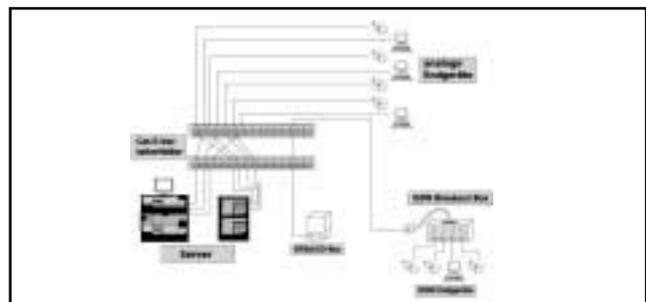



ISDN Products

Order No.	ISDN Outlet, Compact	Pack
0637 0 007-19	Compact ISDN Outlet 2xRJ45/S white, 45° outlet	1 pc

45° outlet, two outlets, flush mounting, RJ45 module, blue shutter.
colour white - RAL 9010

Order No.	ISDN Outlet, Compact	Pack
0637 0 007-20	Compact ISDN Outlet 2xRJ45/G white, 90° outlet	1 pc

90° outlet, two outlets, flush mounting, RJ45 module, blue shutter.
colour white - RAL 9010

Order No.	ISDN Outlet, RJ-K, flush mounting	Pack
6539 1 200-01	RJ-K ISDN Outlet, flush, 2xRJ45 90° outlet	1 pc
6539 1 400-01	RJ-K ISDN Outlet, flush, 4xRJ45 90° outlet	1 pc

90° outlet, flush mounting, RJ45 module, blue shutter.
colour white - RAL 9010

dimensions: 2xRJ45: 85x85 mm
4xRJ45: 145x85 mm

Order No.	ISDN Outlet, RJ-K, surface mounting	Pack
6539 1 401-01	RJ-K ISDN Outlet AP 4xRJ45 90° outlet	1 pc

90° outlet, surface mounting, RJ45 module, blue shutter.
colour white - RAL 9010

Dimension: 4xRJ45: 145x85x40mm

Order No.	ISDN Patch panel	Pack
6527 1 714-24	Patch panel ISDN 24xRJ45/19"	1 pc

ISDN Patch panel for 3 ISDN lines - connected on the back to LSA-PLUS
modules or RJ 45 jacks.

Frontside: RJ45 jacks for connecting up to 3 x 8 ISDN devices.

